CLICK TO FRONT PREVIEW COLORS

OPEN

OPTIONS:

CLICK TO PREVIEW BEZELS

KNOB OPTIONS:

BEZEL

CLICK TO **PREVIEW KNOBS**

PRODUCT DIMENSIONS

Width Height Depth Overall Capacity	48 in. 37 ^{8/16} in. 28 ^{12/16} in. 5.35 Cu. Ft.	121.92cm 95.25cm 73cm 151.49L
Main Oven Usable Width Main Oven Usable Height Main Oven Usable Depth Main Oven Actual Width Main Oven Actual Height Main Oven Actual Depth Main Oven Capacity* Main Handle Length	23 in. 14 in. 17 in. 13 in. 14 in. 17 in. 3.53 Cu. Ft. 28 ^{10/16} in.	58.42cm 35.56cm 43.18cm 33.02cm 35.56 43.18cm 127.4L 72.71cm
Second Oven Usable Width Second Oven Usable Height Second Oven Usable Depth Second Oven Actual Width Second Oven Actual Height Second Oven Actual Depth Second Oven Capacity* Second Handle Length Height Between Rack Mounts Max. Height Between Racks	11 in. 14 in. 17 in. 13 in. 14 in. 17 in. 2 Cu. Ft. 13 ^{6/16} in. 3 ^{12/16} in. 8 ^{2/16} in.	27.49cm 35.56cm 43.18cm 33.02cm 35.56cm 43.18cm 127.4L 33.97cm 9.53cm 20.64cm

*NOTE: Capacity is prior to broiler, oven rack(s), and convection fan. Actual space excludes rack placements and accessories.

FEATURES



20K DUAL BRASS BURNER Provides powerful flexibility, going from a simmer to boiling hot in an instant.



EDGE-TO-EDGE GRATES Edge to edge grates provide a

truly level cooktop, perfect for easily transferring pots and pans.



EASY GLIDE RACKS Easy glide racks deliver quality and convenience with consistent ease.



Diversify your kitchen with a range which supports natural gas and liquid propane conversion.

CONVERTIBLE POWER

ADDITIONAL SPECS

No. of Burners Main Oven BTU Second Oven BTU

22,000 14,000

Rated Voltage 120V-60Hz Amperage No. of Lights

15 Amps 3

Conversion Kit Warranty Terms Certification


Yes

ETL

2 Year


support@forteappliances.com

INSTALLATION GUIDE

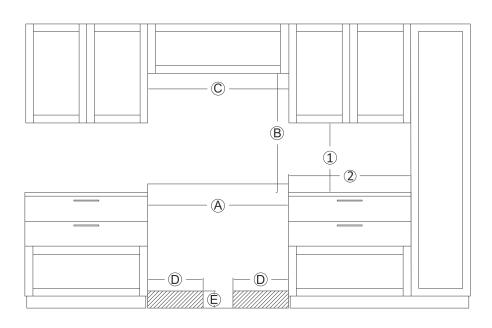


POSITION	DIMENSIONS	DESCRIPTIONS
1	18"/45.7cm	Minimum distance to bottom edge of top cabinet
2	12"/30.48cm	Minimum distance from cooktop surface
Α	48"/121.92cm	Width of cabinet opening
В	26"-32" 66.04-81.28cm	Min. and max. height between cooktop and hood
С	48"/121.92cm	Minimum width of the hood area
D	Approx. 10 ^{13/16} /27.4cm	Maximum gas/elec. connection width from right and left
E	Approx. 4 8/16/11.5cm	Maximum gas/elec. connection height

DIMENSIONS:

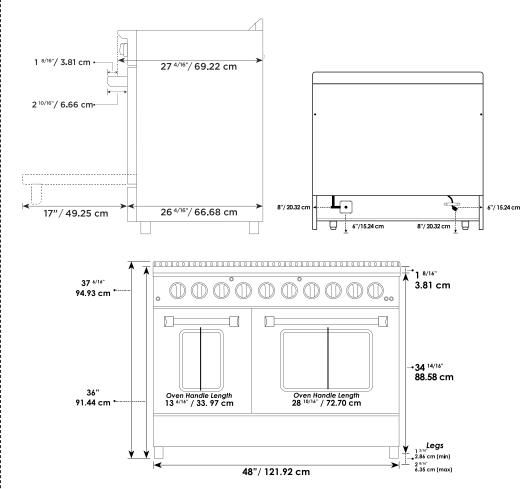

BURNER MAP:



BURNER 1 SMALL (6,000 BTU) BURNER 2 DUAL (20,000 BTU) BURNER 3 SMALL (6,000 BTU) BURNER 4 DUAL (20,000 BTU) BURNER 5 STRD (9,000 BTU) BURNER 6 LARGE (12,000 BTU) BURNER 7 STRD (9,000 BTU) BURNER 8 LARGE (12,000 BTU)