# FORTÉ

### 36" Freestanding Dual Fuel Range

#### **FRONT**



#### **KNOBS**



#### **BURNER**



#### PRODUCT DIMENSIONS

Width Height Depth Depth w/ Door Open 90° Oven Usable Width Oven Usable Height Oven Usable Depth Oven Actual Width Oven Actual Height Oven Actual Depth Height Between Rack Mounts	36 in. 37 8/16 in. 28 12/16 in. 45 12/16 in. 29 in. 14 in. 17 in. 30 10/16 in. 14 in. 17 in. 3 12/16 in.	91.44cm 95.25cm 73cm 122.25cm 73.66cm 35.56cm 43.18cm 63.18cm 35.56cm 43.18cm 9.53cm
Max. Height Between Racks Oven Capacity*		20.64cm 127.4L

\*NOTE: Capacity is prior to broiler, oven rack(s), and convection fan.

Actual space excludes rack placements and accessories.

#### **ADDITIONAL SPECS**

No. of Burners 6
No. of Interior Lights 2
Rated Voltage 240V-60Hz
Amperage 25 Amps
Warranty Terms 2 Year
Certfication ETL

#### **FEATURES:**

Conversion Kit



20K DUAL BRASS BURNER Provides powerful flexibility, going from a simmer to boiling hot in an instant.



EASY GLIDE RACKS
Easy glide racks deliver quality

Yes

' Easy glide racks deliver quality and convenience with consistent ease.




EDGE-TO-EDGE GRATES Edge to edge grates provide a

truly level cooktop, perfect for easily transferring pots and pans.




CONVERTIBLE POWER
Diversify your kitchen with a
range which supports natural gas
and liquid propane conversion.

## INSTALLATION GUIDE

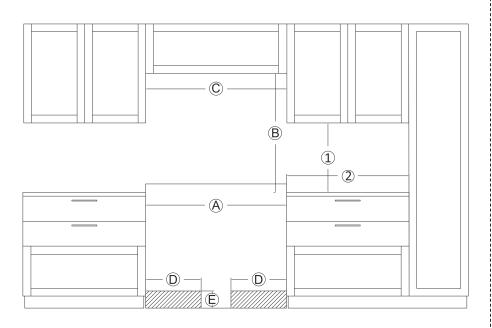


POSITION	DIMENSIONS	DESCRIPTIONS
1	18"/45.7cm	Minimum distance to bottom edge of top cabinet
2	12"/30.48cm	Minimum distance from cooktop surface
Α	36"/91.44cm	Width of cabinet opening
В	26"-32" 66.04-81.28cm	Min. and max. height between cooktop and hood
С	36"/91.44cm	Minimum width of the hood area
D	Approx. 10 <sup>13/16</sup> /27.4cm	Maximum gas/elec. connection width from right and left
E	Approx. 4 8/16/11.5cm	Maximum gas/elec. connection height

#### **DIMENSIONS:**

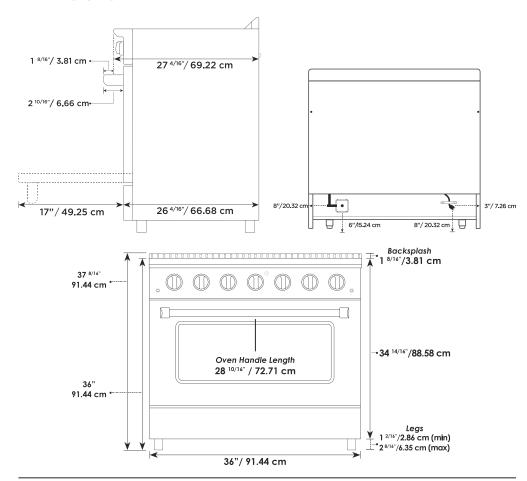

#### **BURNER MAP:**



**BURNER 1** LARGE (15,000 BTU) **BURNER 2** SMALL (6,000 BTU) **BURNER 3** DUAL (20,000 BTU) **BURNER 4** STANDARD (9,000 BTU) **BURNER 5** STANDARD (9,000 BTU) **BURNER 6** LARGE (12,000 BTU)